


1. Introduction:

The 206A-2S is a power comb unit, which is designed for 2 wire system to supply power for outdoor station, indoor monitor and other accessories. It can work both as a normal power comb and auxiliary power comb. The features are as follows:

- Universal AC input/full range
- Multi protection: short circuit, overload, over voltage
- Integrated with PL202(power separator), Additional PL202 is not needed.
- Support up to 4~8 monitors(depend on models)
- DIN rail mounting


2. Terminal Description:

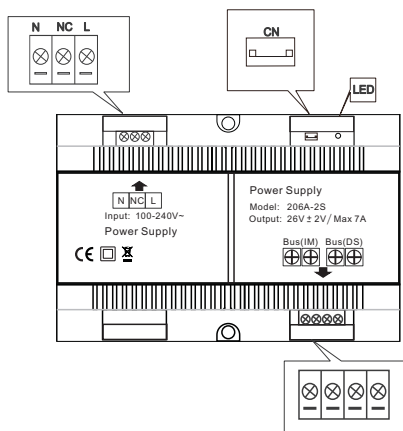


- N: AC input.
- L: AC input.
- LED: power indicator, always on when plug in power.
- CN: bus control terminal.
- BUS(IM): indoor monitor connection terminal.
- BUS(DS): door station connection terminal.

3. Mounting:

- Step1: Mount the din rail to the wall with screws ;
- Step2: Pull down the mounting buckle, then hang the unit on din rail.

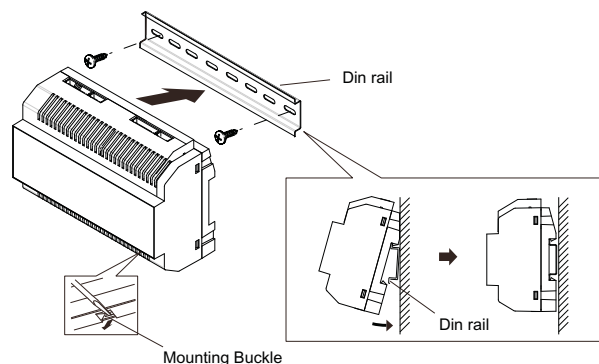

4. Wiring:

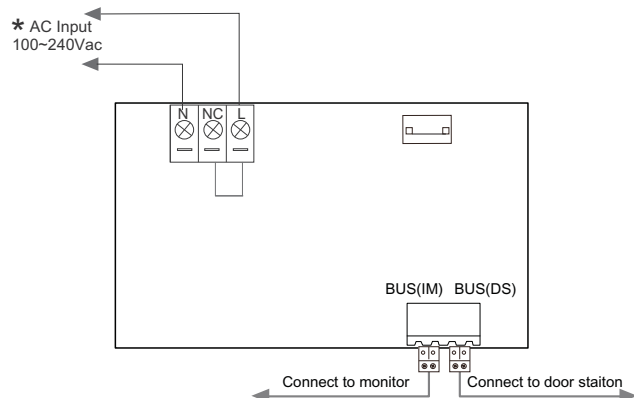

Note:

1. the AC cable is not included in the package, it must comply with requirements of different country.
2. When it work as a auxiliary power comb, CN should be taken off.
3. Both bus two ports commently connect to the monitor and outdoor station.

5. Specification:

Input Voltage:	100~240Vac
Input Frequency:	50~60Hz
Rated Output Voltage:	DC 26V ± 2V
Rated Output Current:	Max 7A
Working Temperature:	-20°C~55°C
SW Port Input Voltage:	Max.230Vac, 2A
Dimension:	140*90*55mm

6. Warning:

- The unit can only be used in 2 wire products supplied by our company.
- Don't connect the unit with any non-specified power source. Fire or electric shock could result.
- Don't dismantle or alter the unit. Fire or electric shock could result.
- The unit must be installed and wired by a qualified technician.
- Keep the unit away from water or any other liquid. Fire or electric shock could result.